



Stopped groove

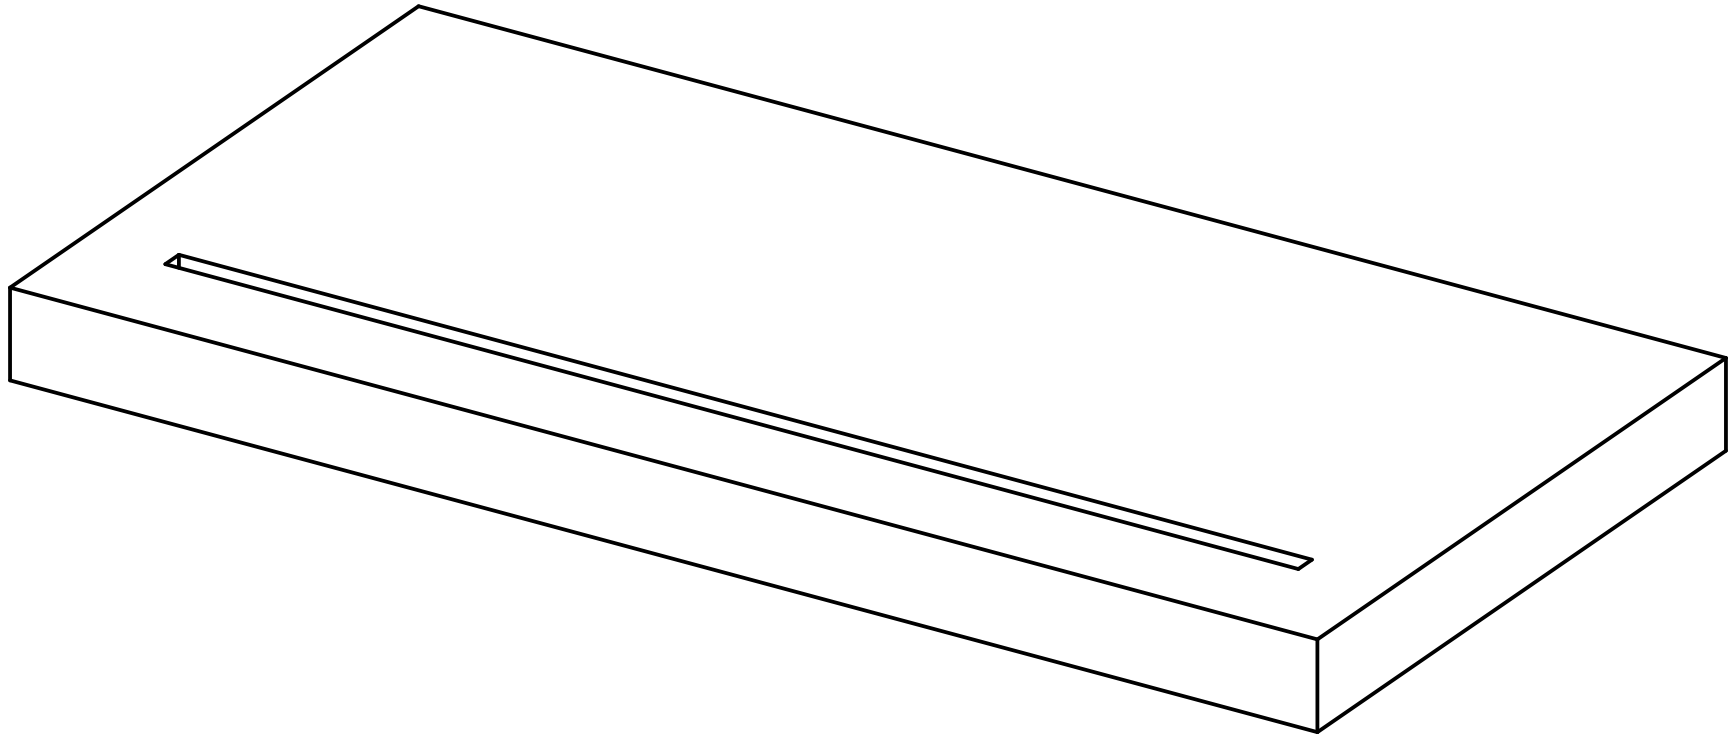


parts	1
overall	600 x 300 x 40 (W x D x H)
material	oak
date	2026-10-25
made with	woodwright 0.9.0

Contents


Drawings	3
1 board	3
Cut list	4
Appendix: source	5

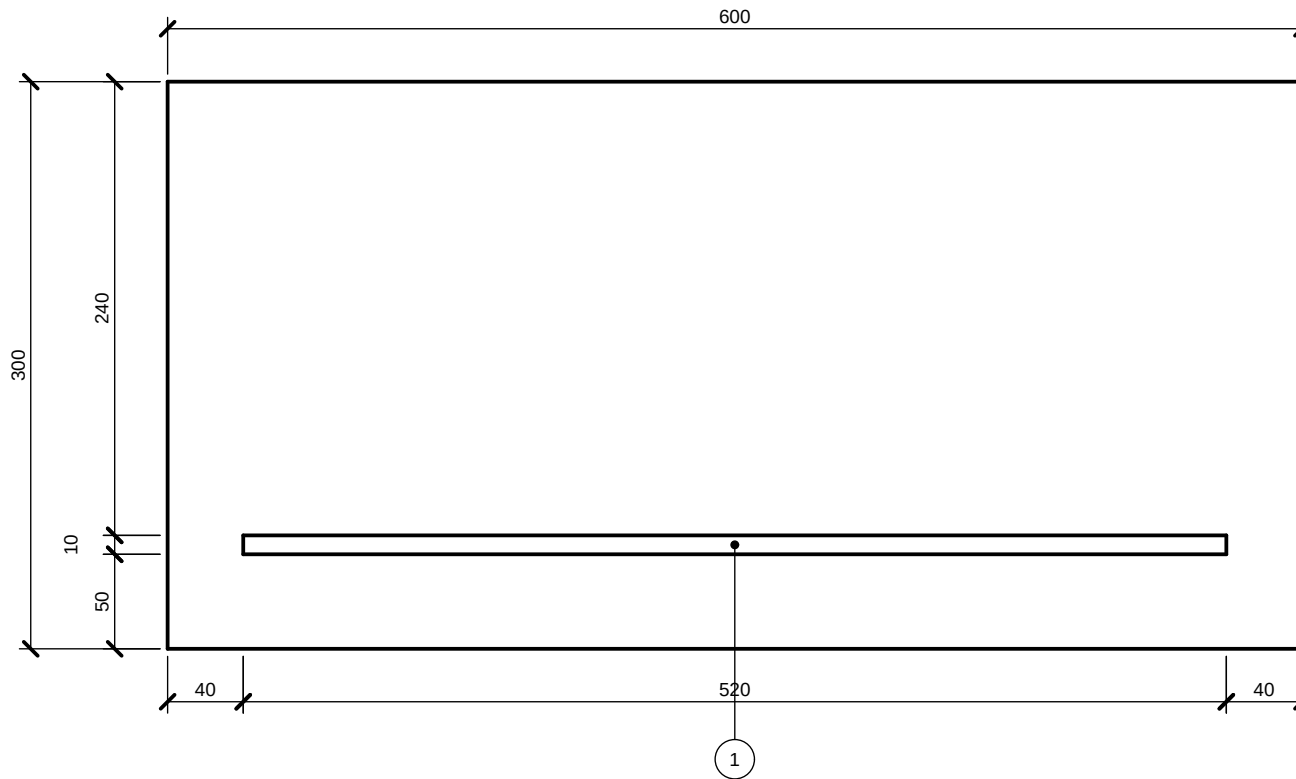

TOP FACE

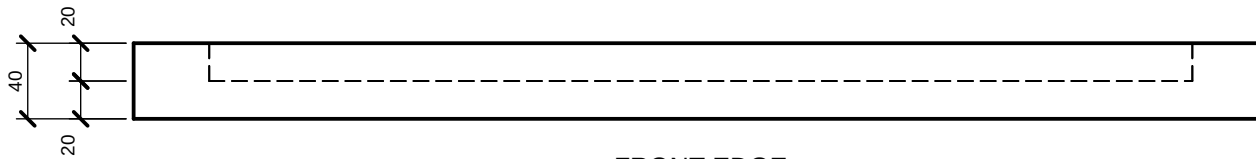

FRONT EDGE

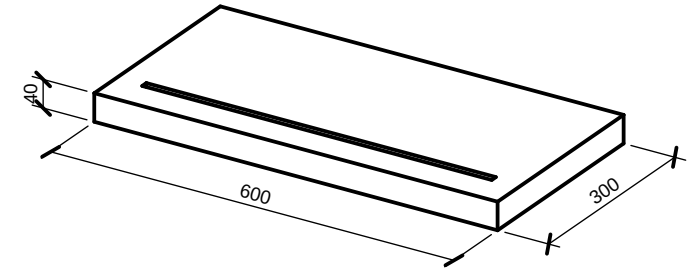

ISOMETRIC

1 stopped groove 10 mm, 20 deep, in top_face, 40 mm short of left_end and 40 mm short of right_end

part	board
of	stopped_groove
make	1
cut size	600 x 300 x 40
material	oak
scale	1:4, mm

Cut list

board 600 x 300 x 40 mm oak
- stopped groove 10 mm, 20 deep, in top_face, 40 mm short of left_end and 40 mm short of right_end

Appendix: source

Made with woodwright 0.9.0, build123d 0.13.0, Python 3.14.4.

To make these plans again:

```
uvx --python 3.14 woodwright==0.9.0 export cuts.stopped_groove
```

cuts.stopped_groove, in woodwright/examples/cuts.py

```
def stopped_groove(
    distance: float = 50,
    width: float = 10,
    depth: float = 20,
    stop: float = 40,
    stock: Stock = THICK_OAK,
) -> Assembly:
    """A groove stopped `stop` short of both ends, so it shows at neither."""
    asm, board = _board("stopped_groove", stock)
    board.cut(
        Groove(
            board.top_face,
            width=width,
            depth=depth,
            distance=distance,
            stopped={board.left_end: stop, board.right_end: stop},
        )
    )
    return asm
```